
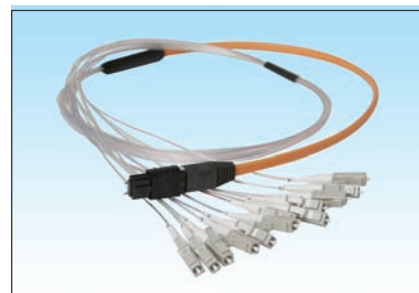
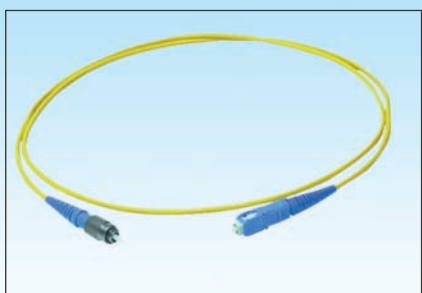


## Fiber Optic Patch Cords and Pigtails

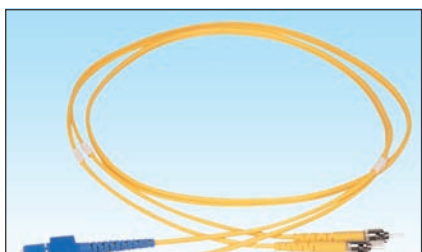

### Description

HCS DataLight Patch Cords and Pigtails series provides a full range of high quality assemblies, supporting all state-of-the-art connectors types, including ST, SC, SC/APC FC, FC/APC, LC and MPO. Other types, such as SMA, FDDI, and VF-45 are available upon request.

HCS DataLight Patch Cords and Pigtails are available with all fiber types including Singlemode 9/125 microns, Multimode 50/125 microns (OM2, OM3 and OM4) and Multimode 62.5/125 microns fibers in any length required.

HCS DataLight Patch Cords and Pigtails are available with different buffer and jacket types and colors, including bare fibers (250 microns), tight buffers (900 microns) or jacketed minicables in Simplex or Duplex (Zip-cord) constructions.

HCS DataLight Patch Cords and Pigtails can be custom-made with breakout or MTD cables in multi-fiber constructions.

HCS DataLight Patch Cords and Pigtails comply with both major industry standards, ANSI/TIA/568-C.3 (Optical Fiber Cabling Components Standard) and IEC 60874 (Connectors for optical fibers and cables) and they are supported by the DoubleSafe™ QA program as a part of complete HCS cabling system.

### Applications

- FiberOptic cross connect, patch panels, and distribution point connection.
- ODF connections.
- Fiber to the desk connection.
- Active FiberOptic equipment connection.

### Qualifications and Approvals

HCS DataLight components are supported by the DoubleSafe™ QA program as a part of complete HCS cabling system and comply to ANSI/TIA/EIA-568-B.3 (Optical Fiber Cabling Components Standard) and IEC 60874 (Connectors for optical fibers and cables).

### Benefits & Features

- ✓ Full compliance to industry standards - providing high quality components.
- ✓ Available with all major fiber types - providing a wide range of products.
- ✓ Available with all major connector types, including hybrid constructions - providing a wide range of products.
- ✓ Available in 12 different colors - providing a better compatibility and a wider selection range.
- ✓ Robust design - providing low rejection and replacement rates.
- ✓ Unique DoubleSafe™ Quality Assurance Program - providing lowest rejection rate available.

### Technical Specifications - Connectors

Connector Type	SC	SC/APC	ST	FC	FC/APC	MT-RJ	LC	MPO
Connector Part								
Connector Housing	Thermoplastic	Thermoplastic	Thermoplastic Nickel Plated Zinc	Nickel Plated Zinc	Nickel Plated Zinc	Thermoplastic	Thermoplastic	Polybutylene Terephthalate
Connector Ferrule	Zirconia Ceramic	8° Zirconia Ceramic	Zirconia Ceramic	Zirconia Ceramic	8° Zirconia Ceramic	Thermoplastic	Ceramic	PPS
SM Alignment Sleeve	Zirconia Ceramic	Zirconia Ceramic	Zirconia Ceramic	Zirconia Ceramic	Zirconia Ceramic	-	Ceramic	NS
MM Alignment Sleeve	Zirconia Ceramic	-	Metal	Zirconia Ceramic	-	-	Ceramic	NS
Boot	Polyester	Polyester	Polyester	Polyester	Polyester	Polyester	Polyester	Silicone
SM Backbone	Aluminum	Aluminum	Zinc Alloy	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
MM Backbone	Aluminum	-	Zinc Alloy	Aluminum	-	Aluminum	Aluminum	Aluminum
Flame Test	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0

Note: MM=Multimode, 50/125 and 62.5/125 microns fibers. SM=Singlemode 9/125 microns fibers.